


ACE EQUIPMENT COMPANY




6030HD VERTICAL BALER

BUILT TUFF


ACE
EQUIPMENT COMPANY
Trash Compactors & Balers
ANTIGO, WI 715-627-2400
aceequipmentcompany.com

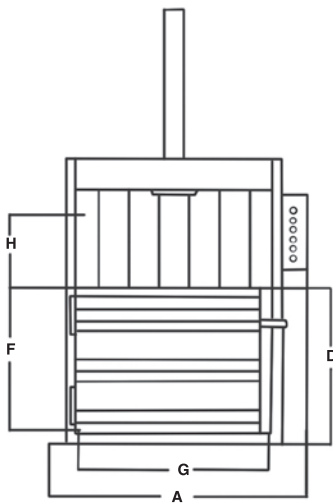

FRONT VIEW

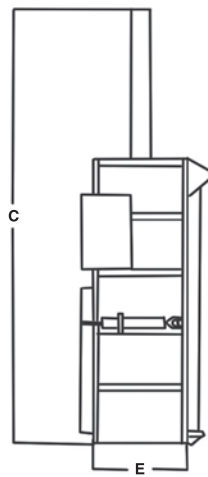

SIDE VIEW



TOP VIEW

DIMENSIONAL DATA

| | | |
|---|---------------------|------|
| A | OVERALL WIDTH | 80" |
| B | OVERALL DEPTH | 40" |
| C | OVERALL HEIGHT | 139" |
| D | FEED HEIGHT | 50" |
| E | BALE CHAMBER DEPTH | 30" |
| F | BALE CHAMBER HEIGHT | 44" |
| G | LOAD OPENING WIDTH | 60" |
| H | LOAD OPENING HEIGHT | 24" |
| I | BALE DOOR CLEARANCE | 61" |

BALE SIZE DATA

| | |
|---|-------------------|
| BALE WIDTH | 60" |
| BALE DEPTH | 30" |
| BALE HEIGHT | 42" |
| BALE TIES (HIGH TENSILE WIRE) 6-14 GA.* | 14' |
| BALE WEIGHT (OCC) | 850 to 1,100 LBS. |

6030HD VERTICAL BALER

SPECIFICATIONS

- ❑ 6" Dia. x 48" Cylinder with 4" rod
- ❑ 67,824 lbs. baling force
- ❑ 10 HP Motor
- ❑ 10 GPM - 1 Stage Pump
- ❑ 3 Phase 230/460 Volt
- ❑ Bale Size: 60"L x 30"W x 48"H
- ❑ Baler Weight 4,850 lbs



INCLUDED EQUIPMENT & FEATURES

- ❑ Auto/cycle hold position controls
- ❑ AUTOMATIC load door opener
- ❑ NYLATRON wear pads, no metal on metal contact
- ❑ Easy tie channel system for fast, easy tying off bales
- ❑ SYSTEM INDICATOR LIGHT to assure ease of operation
- ❑ SOFT SHIFT design for added life of hydraulic components
- ❑ TIMED BALING sequence for dense consistent bales NO PRESSURE SWITCHES
- ❑ Key operated controls for authorized use only
- ❑ FEED GATE MECHANICAL LOCK to lower door for safe baling operation
- ❑ COMPUTER OPERATED, with indicator lights IE: indicate door open
- ❑ DWELL time against cardboard for dense consistent bales
- ❑ Front and rear retainer teeth to prevent build up
- ❑ Proximity (safety) sensors on both doors to assure safe operation, bottom door shut and feed gate locked before auto cycle can be initiated.

OPTIONS

- ❑ Take a look at our 72" Vertical Baler
- ❑ 208 & 575 Volt three phase
- ❑ Single Phase

ACE Equipment Company
 1404 Smith Ave.
 Antigo, WI 54409
 Phone: 715-627-2400
 Fax: 715-627-2402

Website: www.aceequipmentcompany.com
 email: aceequipmentcompany@msn.com

